
## **Single - Swing Traffic Door Technical Data**




| Door              |   | Parts Name  | Description  |
|-------------------|---|---|--|
| Door Body         | 1 | Door leaf frame   | 1.2mm/ Stainless steel sheet                       |
|                   | 2 | Door panel  | 1.0mm Stainless steel door panel                   |
|                   | 3 | Core material   | Opt1:Moisure proof board; Opt2: aluminum honeycomb |
|                   | 4 | Observation Window  | 5mm thick tempered double-layer insulating glass   |
|                   | 5 | Reinforce steel tube  | Aviod deformation caused by external force.        |
|                   | 6 | Rubber Tile   | Anti-impact rubber (plastic) plate.                |
| Wall frame        | 1 | single side wall frame  | 1.2mm/ S.S sheet                                   |
|                   | 2 | Full wall frame   | 1.2mm/ S.S sheet                                   |
| Hardware<br>Parts | 1 | Hinges  | heavy loading & lower door hinge protector         |
|                   | 2 | Accessories   | Glass window, rubber strip around door seal        |
| Application       |   | warehouse, cold storage, storage room, hospital, operating room, passage, rest room, reception room, food factory, etc. |  |
| Standard Size     |   | Width: 900 / 950 mm; Height:2100.0mm; Thickness: 40.0mm   |  |
| Opening Angle     |   | 0° - 170°   |  |





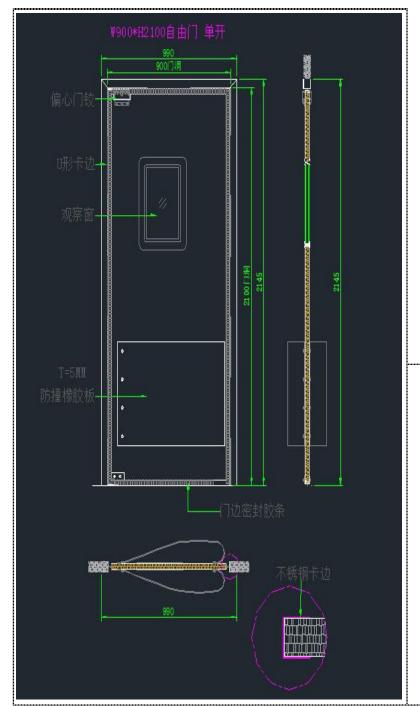

## **Double - Swing Door Technical Data**

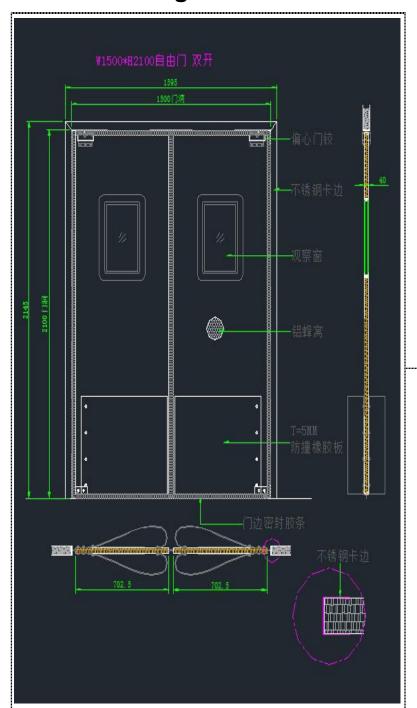

| Door          |   | Parts Name  | Description  |
|---------------|---|---|--|
| Door Body     | 1 | Door leaf frame   | 1.2mm/ Stainless steel sheet                       |
|               | 2 | Door panel  | 1.0mm Stainless steel door panel                   |
|               | 3 | Core material   | Opt1:Moisure proof board; Opt2: aluminum honeycomb |
|               | 4 | Observation Window  | 5mm thick tempered double-layer insulating glass   |
|               | 5 | Reinforce steel tube  | Aviod deformation caused by external force.        |
|               | 6 | Rubber Tile   | Anti-impact rubber (plastic) plate.                |
| Wall frame    | 1 | single side wall frame  | 1.2mm/ S.S sheet                                   |
|               | 2 | Full wall frame   | 1.2mm/ S.S sheet                                   |
| Hardware      |   | Hinges  | heavy loading & lower door hinge protector         |
| Parts         | 2 | Accessories   | Glass window, rubber strip around door seal        |
| Application   |   | warehouse, cold storage, storage room, hospital, operating room, passage, rest room, reception room, food factory, etc. |  |
| Standard Size |   | Width < 2500.0mm; Height < 2400.0mm; Thickness: 40.0mm  |  |
| Opening Angle |   | 0° - 170°   |  |



